


Part # DWB

General Description

The Dalmau Workbench consists of a 1200 x 1200 x 840 H four person work station. It comes standard with four Quick Action woodworkers vices with integral vice dogs. The bench top and sides are drilled on point-to-point routers with 20mm diameter holes to accept Dalmau Benchdogs. These dogs used in conjunction with the vices make the clamping of a wide range of sizes of stick and sheet stock possible.


Replaceable hardboard wear surface

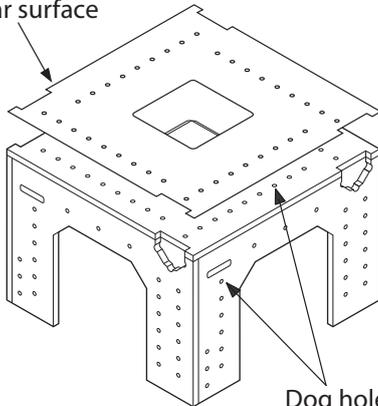

Bench Dimensions:
1200 x 1200 x 840H


Dog holes with threads underneath to accept accessories

Quick Acting 175mm Wood Vices




4 x

Hold down clamps with hollow tapped bolts



2 x

Dalmau Benchdogs



4 x

Features & Benefits


Accessories

Under all the dog holes on the top and behind some dog holes on the sides there are screw threads to allow the use of bolts for attaching hold down clamps and other accessories.

Accessories include Vice Adaptor Mates which allow a number of different kinds of metalworking vices to be quickly added and removed from the bench. Zinc plated mild steel wear plates can be added or removed from the top of the bench which has a dimpled hardboard wear surface as the standard top treatment.

Services

The Dalmau Workbench has a built in tool well in the centre accessible from the top. The walls of this well can be fitted with a 4 gang General Purpose Electrical Outlet. The lead from these GPO's can be plugged into an overhead pendant GPO or a floor mounted GPO. Compressed air can be reticulated to the centre well from the floor or supplied above on a pendant.



Materials

The Dalmau Workbench is constructed from clear lacquered OE MR MDF board with masonite hardboard top. The hardboard is applied dimpled side up for the purpose of adding extra gripping power when hold down clamps are used.

Handling

The Dalmau Workbench can be assembled on site from flat packed elements or delivered assembled via tailgate lift truck. The benches can be moved by forklift or mobile hydraulic lift tables. The basic bench with vices weighs 240 kgs.

